



CENTSYS



D3 SMART

D5 EVO SMART

RESIDENTIAL / LIGHT COMMERCIAL SLIDING GATE OPERATORS

SMART.
The intelligent choice



A BRAND OF
FAAC TECHNOLOGIES





**SMART ACCESS
TO YOUR HOME**

TAKE YOUR HOME SECURITY AND CONVENIENCE TO THE NEXT LEVEL WITH CENTSYS' INNOVATIVE D3 SMART AND D5-EVO SMART GATE MOTORS

Our cutting-edge domestic and residential access solutions offer a perfect blend of intelligent features, reliable performance, and user-friendly design, catering to both budget-conscious homeowners and those seeking a powerful upgrade.

Choose from two exceptional options:

D3 SMART

Bringing Innovation to Every Entryway

Experience the **D3 SMART**, a gate motor that embodies the philosophy of **simplicity being the pinnacle of sophistication**. This solution provides premium performance and smart features at an accessible price point, making secure and reliable gate automation attainable for everyone.

Here's why you'll love the D3 SMART:

Fast and Secure

Open and close your gate in a flash, keeping unwanted visitors at bay.


Smart Control

Manage your gate with maximum convenience and flexibility with the user-friendly smartphone app.

D3 SMART

D5_{EVO} SMART

SMART.
The intelligent choice.

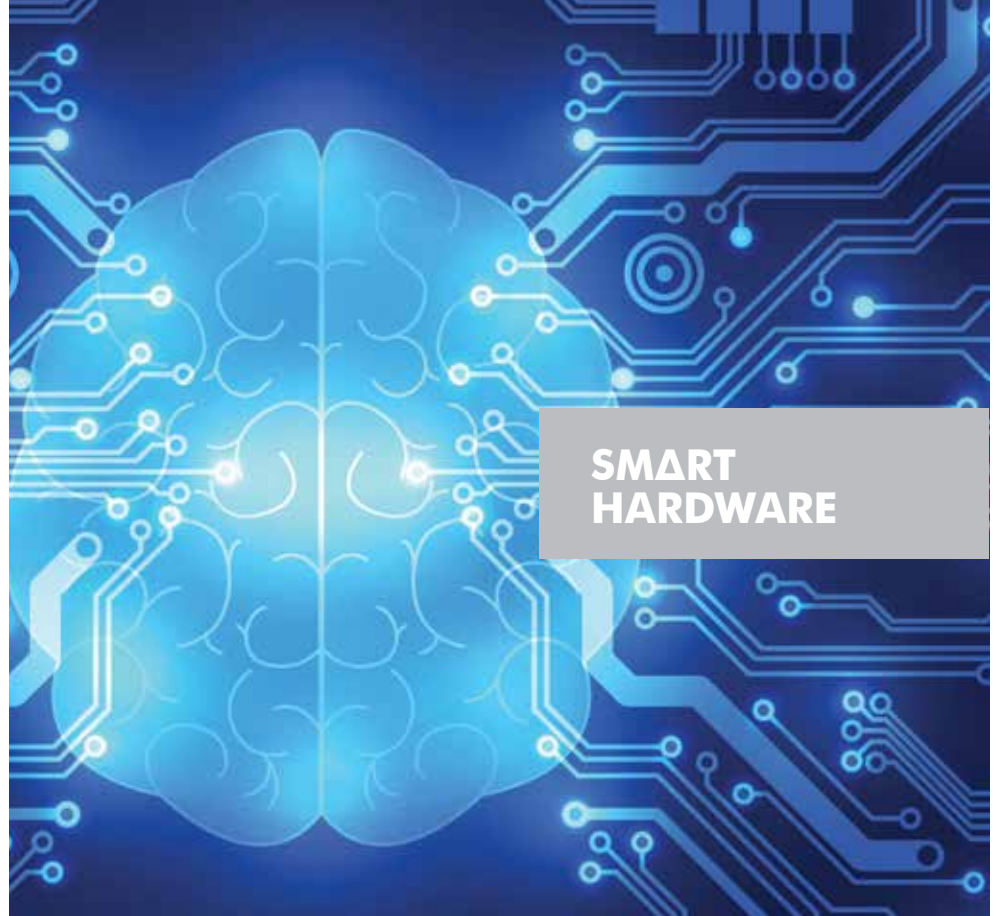

SMART HARDWARE

Easy Installation

Saving installers time and effort with the industry-leading design.

Reliable Performance

Never miss a beat with dependable battery-driven technology.

Intelligent Features

Advanced alerts, notifications and reporting keep you informed and in control.

Peace of Mind

Enjoy outstanding security with the improved theft-resistant cage.

Convenient Commissioning and Operation

Effortless smartphone setup and single-action manual release.

Wireless, Effortless Safety

Compatible with Photon SMART Beams for a complete wireless experience.

*Upgrade your security without breaking a sweat. Choose the **D3 SMART** gate motor, the smart choice for every home.*

D5-EVO SMART

The Evolution of Strength and Performance

The iconic D5-EVO, reimagined.

The gate motor synonymous with reliability and performance just got smarter. Introducing the **D5-EVO SMART**, powered by award-winning technology and designed to enhance your security experience.

More than just an upgrade, it's an evolution.

The **D5-EVO SMART** retains the legendary strength and dependability of its predecessor, now enhanced with intelligent features that put you in complete control. Enjoy effortless smartphone control, advanced diagnostics for ultimate peace of mind, and dependable battery-driven technology that keeps you protected even during power outages.



SMART ADVANCED DIAGNOSTICS

Unleash the power of SMART:

Seamless Control

Manage your gate with maximum convenience, control and flexibility with the user-friendly smartphone app.

Intelligent Insights

Advanced notifications, alarms, monitoring and reporting keep you informed and in control.

Uninterrupted Security and Convenience

Dependable battery-driven technology ensures seamless operation even during power outages.

Effortless Setup

Wireless configuration and smartphone control make installation a breeze.

Enhanced Security

The improved theft-resistant cage and built-in tamper alarm offer unparalleled peace of mind.

Ultimate Versatility

Individually-configurable inputs and outputs allow for harmonious integration with your SMART ecosystem.

*The **D5-EVO SMART** is a statement. It's a monument of innovation, a commitment to security, and an assurance of peace of mind.*

Experience the future of gate control, powered by the legacy of the D5-EVO.

GIVE YOUR PEACE OF MIND A SMART UPGRADE

Our state-of-the-art domestic and residential sliding gate range has been designed to transform your home into the have of safety and security it was meant to be. Give your peace of mind a SMART upgrade and enjoy unmatched convenience at your fingertips with leading-edge features that put you at the controls, experiencing gate access like never before. Harmoniously combining winning performance and trailblazing security technology, the **D3 SMART** and **D5-EVO SMART** are the perfect match for safeguarding your premises and keeping you, your loved ones and your property safe.

ACCESSORIES



Steel Reinforced Nylon Rack
Keeps sliding gates running smoothly - reinforced for added strength and performance



Photon SMART PE Beams
Fully-wireless PE safety beams. Always recommended on any SMART automated installation



Solar Supply
Alternative means of powering the system - consult your CENTSYS dealer



Metal Gate Station
Communication hub for the G-SPEAK ULTRA GSM intercom - available in stylish and strong metal enclosures



SMARTGUARD or SMARTGUARDair Keypad
Cost-effective and versatile wired and wireless keypad, allowing access to users with a customised code



FLUX SA Loop Detector
Allows free-exit of vehicles from the property - requires ground loop to be fitted



CENTSYS Transmitters
Available in one-, two- and four-button variants. Incorporates code-hopping encryption



Theft-Deterrent Cage & Padlock
Patented design provides excellent deterrence against theft, tampering and vandalism



Gooseneck
Steel pole for mounting intercom gate station or access control reader



Low-voltage Charger
Enjoy a safe, reliable and cost-effective way to power your gate operator and enjoy outstanding performance and exceptional flexibility



Low-voltage Power Supply
If 240V power at the gate is not feasible, this optional low-voltage power supply kit is a simple, cost effective option



G-ULTRA
The ultimate GSM solution for monitoring and activating the operator via your mobile phone



G-SPEAK ULTRA
Answer your intercom from anywhere for maximum security and convenience - powered by 4G technology



12V-24V SMART Siren
A top-notch security companion, designed to seamlessly integrate with your existing SMART gate and garage door operators (not shown in diagram) (not compatible with D3 SMART)


TECHNICAL SPECIFICATIONS

Technical Data	D3 SMART		D5-EVO SMART		
Input voltage	110V - 240V AC 50/60Hz ¹ or; Low-voltage 16V AC or; Solar Power				
Current consumption (Mains)	320mA peak				
DX12V Battery charger current output	1.8A @ 14.3V +/- 5% (28W)				
Maximum number of operations per day	20 ^{3,6}		150 ^{3,6}		
Motor voltage	12V DC				
Motor power supply	Battery-driven (Standard Capacity - 1x 12V)				
Current consumption (motor at rated load)	11A		15A		
Input / Output sink currents (Max accessory current draw)					
I/O 4 and I/O 5	-		100mA (12V)		
O6	-		3A (12V) 10sec Pulse		
Motor push force - starting	18kgf		30kgf		
Motor push force - rated	12kgf		17kgf		
Gate mass - maximum	300kg		500kg		
Gate length - maximum	10m		20m		
Gate speed (varies with load) ⁴	Up to 24m/min / 400mm/sec				
Manual Override	Lockable with key release				
Operations whilst in Battery backup mode with 7.2Ah Battery	Operating Modes				
	Up to 24m/min 7kgf	Up to 24m/min 12kgf	Up to 24m/min 7kgf	Up to 18m/min 17kgf	
	Half day ^{5,6,8}	90	80	90	44
	Full day ^{5,6,8}	70	65	70	35
Collision Sensing	Electronic				
Operating temperature range	-15°C to +50°C				
Onboard receiver type	Code-hopping multichannel receiver with selective add and delete				
Receiver code storage capacity	32 Remotes ⁷		1500 Remotes ⁷		
Receiver frequency	433.92MHz				
Degree of protection	IP55				
Mass of unit packed (with standard kit, but excl. Rack and Battery)	6.7kg		7.1kg		
Packaging dimensions (with standard kit, but excl. Rack and Battery)	325mm wide x 245mm deep x 395mm high				

- Can operate off a solar supply, consult your local dealer for assistance.
- Based on 25°C ambient temperature and unit not in direct sunlight.
- Based on a motor push force of less than 50% of rated (Starting and Running forces).
- Gate opening and closing speeds can be configured to run slower depending on the requirements of individual installations.

- Can increase battery capacity for longer standby times.
- Based on 4m gate, excluding all accessories.
- Multiple buttons per remote can be used.
- Dependant on the type and condition of the Battery.

OVERALL DIMENSIONS¹

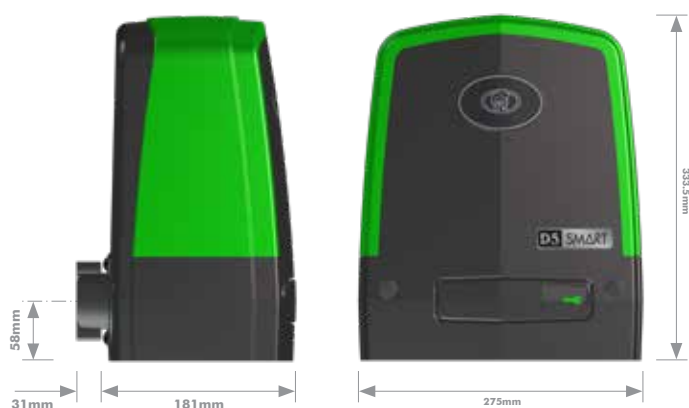

¹ The D3 SMART and D5-EVO SMART have the same dimensions.

1410.D.02.0003_16102024

Call: 1300 322 228 (FAAC Australia) or Email: sales@faac.com.au to order or to find out more
Technical Support Email: technical.au@faactechnologies.com (Monday - Friday: 08h00 - 16h30, Saturday: 08h00 - 14h00)
E&OE. Centurion Systems (Pty) Ltd, RSA reserves the right to change any product without prior notice