



# Multicom Classic

Multi Apartment Intercom!



- **Calls up to 1000 apartments from a single SIM card. (3 users per apartment)**
- Visitors can scroll for residents, or enter apartment number to call.
- HD voice with VoLTE\*.
- Programmable via free Android and Iphone app: AES PRO.
- Prox reader comes as standard.
- Built in time clock for auto opening and closing of gates, barriers or doors in busy periods or for day time operation.
- Do not disturb feature.

\*Requires correct APN to be set and will only be experienced on a VoLTE enabled device.



Free programming app.

Technical Details			
Dial Out Numbers per Apartment	3	Relays	2
Keypad Codes per Apartment (6 digit)	1	Relay Type	N/C and N/O
Prox Cards/Tags per Apartment	3	Relay Load	2 amps, 24v ac max
Automatic Trigger Events per Week	10	Power Consumption	310mA on dial out, 2amp peak demand
Modem Models	4G EU, 4G USA, 4G AUS/NZ	Power Supply	24v dc (24v dc 2A adaptor included)

	Codes/Cards		
	Permanent	Time-restricted	Temporary
Visitor Prox Cards	250	250	50
Visitor Caller ID	250	250	50
Visitor Keypad Codes (4 digit)	250	250	50





The Multicom Classic is available in a sleek imperial style panel.

Each kit contains, a speech panel, power supply, install manual, sim card options and a high gain antenna. Plus card/tags for handy prox access.



**MULTI-CL-IBPK-AU**


Sleek all-black panel with blue lighting.




**MULTI-CL-ISPK-AU**

Full steel panel with white lighting.

**IBPK**

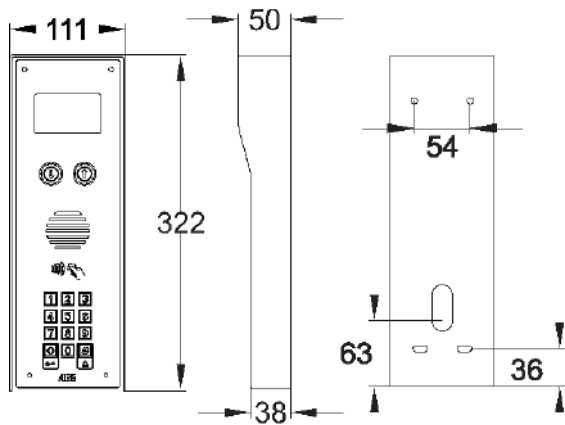

**PBPK**

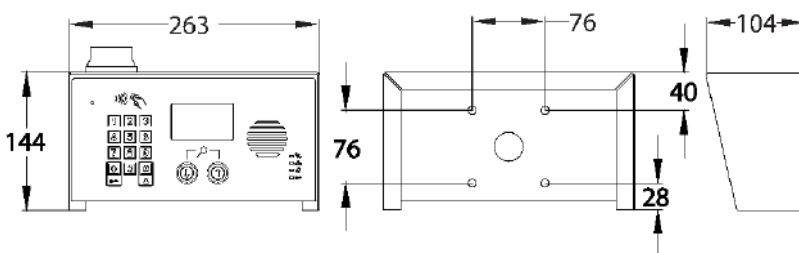

**MULTI-CL-PBPK-AU**

PEDESTAL MODEL – Sleek all-black panel.